



C PERMANENT PACKER


PRODUCT 20-042

The C Permanent Packer is an economical medium performance Permanent Packer, designed specifically for dual zone gas well completions and rated for 45,000 kPa (6,500 PSI) differential pressure.

It may be wireline set using an E-4 Setting Assembly, or hydraulically set on tubing using a B Setting Tool (or equivalent). The 114mm C Permanent Packer may be set on endless tubing using an N Setting Tool (or equivalent).

The C Permanent Packer features opposing slips, which combine to ensure a solid reliable pack off. A large seal bore similar to the L Packer gives this tool maximum versatility.

CASING			PACKER SIZE	SEAL BORE I.D.	NOK-OUT SIZE
O.D.	WEIGHT			IN/MM	
IN/MM	LBS/FT	KG/M			
4 1/2 114.3	9.5 - 11.6	14.1 - 17.2	20-042-0460	2.390 60.7	20-049-0239
5 1/2 139.7	13.0 - 17.0	19.3 - 25.3	20-042-0560	3.000 76.2	20-049-0300

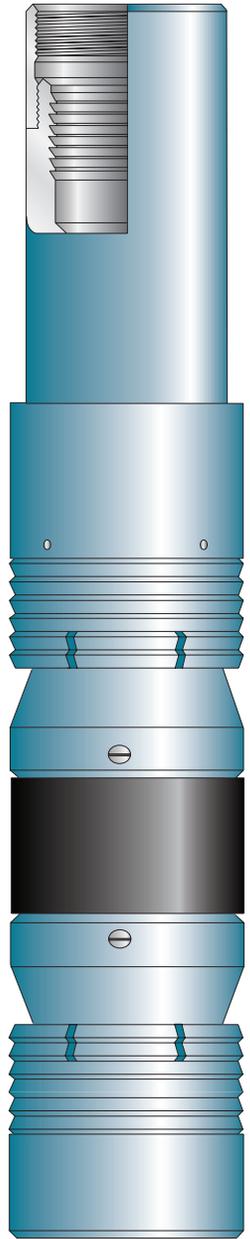

LC NOK-OUT

PRODUCT 20-049

The LC Nok-Out Assembly is often run with the Model C and L Packers and then converted to a temporary Bridge Plug. The Nok-Out is usually expended when the Seal Assembly is landed, or can be knocked out at any time before running the Seal Assembly with a knock out string or a wireline sinker bar. The Nok-Out Assembly has a built in equalizing system to ensure ease of expending the plug.



TechWest products and services are subject to TechWest's standard terms and conditions. For more information concerning the full line of TechWest products and services please contact your authorized TechWest representative. Unless noted otherwise, trademarks and servicemarks noted herein are the property of TechWest. 2008. TechWest. All rights reserved.